

SOLIS



WWW.SOLISBELGIUM.BE



16

16HP

4X4

979CC

6+2 GEAR

**TYRES OPTION:
AGRI/IND/TURF/GALAXY**

PROMO

SOILS

20



20HP

4X4

953 CC



**MITSUBISHI
MOTORS**

6+2 GEAR

**TYRES OPTION:
AGRI/IND/ TURF/GALAXY**



**STRATEGIC
COLLABORATION
WITH
YANMAR**



**3 CYLINDER
MITSUBISHI
ENGINE**



**1SA/1DA
AUXILIARY
HYDRAULIC
CIRCUIT**



**MECHANICAL
TRANSMISSION
FOR SPEED
PRECISION**



**SLEEK
& STYLISH
BONNET**

SOILS

22

22HP

4X4

1130 CC

6+2 GEAR



TYRES OPTION:
AGRI/IND/ TURF/GALAXY



Radial Agri: Front | Rear



Turf: Front | Rear



Ind: Front | Rear



Galaxy Pro

SOLIS

26 XL⁺

SIDE SHIFT GEAR



26HP

4X4

1319CC

6+2 GEAR

SIDE SHIFT

TYRES OPTION:

**AGRI/IND/TURF
GALAXY**



**MITSUBISHI
MOTORS**



MECHANICAL
TRANSMISSION FOR
SPEED PRECISION



HI-LOW SPEEDS
LEVER



SLIDING MESH
TRANSMISSION WITH
6+2 SPEED



SIDE SHIFT GEAR
LEVER FOR
COMFORT



3 CYLINDER
DIESEL ENGINE



HIGH BACK UP
TORQUE



LOW
MAINTENANCE



BETTER
COOLING



**LIFTING
CAPACITY**

750 KG

SOILS

S26
SHUTTLE 9+9



26HP

4X4

1319CC



**MITSUBISHI
MOTORS**

9 + 9

REVERSED GEAR.

**TYRES OPTION:
AGRI/IND/ TURF/GALAXY**



JOINT VENTURE WITH
YANMAR



SOLIS

H26

THE TOUGHEST
PERFORMER
FOR YOUR FIELD

26HP

4X4

1319CC




MITSUBISHI
MOTORS

HYDROSTATIC

**TYRES OPTION:
AGRI/IND/TURF/GALAXY**



3 CYLINDER
MITSUBISHI
ENGINE



1SA/1DA
AUXILIARY
HYDRAULIC
CIRCUIT






















HYDRO-
STATIC
TRANSMISSION
(HST)



SLEEK &
STYLISH
BONNET



SPECIFICATIONS

FEATURES						
ENGINE 						
Engine Type	ITL 3 Cylinder	3 Cylinder (Water Cooled) Engine	ITL Make - GTV BB	3 Cylinder Diesel Engine	3-Cylinder Diesel Engine	3-Cylinder Diesel Engine
HP Category	16	20 	22	26 	26 	26 
No. of Cylinders	3					
Aspiration	Naturally					
Cubic Capacity (cc)	979	953	1130 cc (1.13 ltr)	1319	1319	1319
Rated RPM (+/-25mm)	2700	2700	2700	2500	2500	2500
TRANSMISSION 						
Drive	4WD					
Clutch	Single Clutch				Wet type clutch for PTO	Single Clutch
Gearbox	6 Forward + 2 Reverse				Hydrostatic	9 Forward + 9 Reverse
Transmission	Sliding Mesh				HST (2-Stufen Hydrostat)	Constant Mesh with Synchronesh Shuttle Lever
SPEED (FORWARD) 						
Maximum Speed (Km/Hr)	15.1@2950	15.1@2900	17.02@2950	16.2@2815 fly up	21.03@2660	21.46 @2760 fly up
Minimum Speed (Km/Hr)	1.36@rated		2.13@rated	1.64@2500 rated	3.18 at low idle 900 erpm, 8.83@rated erpm	1.14@rated
BRAKES 						
Brakes	Dry Drum Brakes			Oil Bath Brakes	Oil Immersed Brakes	
PTO 						
PTO (rpm)	540, 1000				Mid PTO- 2100 RPM, Rear 540	540/540E
PTO (actuation)	Mechanical				Electro hydraulic operated/mechanical selector lever	Mechanical
HYDRAULICS 						
3 Point Linkage	Cat 1 - N					
Hydraulic Lifting Capacity Kg	500	600				
Litre per Minute (LPM)	12	13.3	13.7	13.5	16.5	17.8
CAPACITY (LTRS)(+/-5%) 						
Fuel Tank (Lit)	26	26	26	28	22	20
TURNING RADIUS 						
Without brakes (m) as per standard tyres	3.2 (RHS), 3.3 (LHS)	3.2 (RHS), 3.3 (LHS)	3.28 (RHS), 3.15 (LHS)	3.18 (RHS), 3.10 (LHS)	3.05 (RHS), 2.62 (LHS)	3.02 (RHS), 3.15 (LHS)
DIMENSION & WEIGHT(+/-5%) 						
Weight (Kg)	970	970	1070	1070, 1265 with Cabin	1235	1250
Wheel Base (mm)	1420	1420	1560	1560	1570	1570
Total Length (mm)	2735	2735	2750	2760	2895	2895
Total Width (mm)	945 (max) - 940 (min)	945(max)-940(min)	1075 (max) - 1050 (min)	1075 (max) - 1055 (min)	1215 (max)-1050 (min)	1215 (max)-1050 (min)
Height (mm) Up to ROPS	1945	1945	1940	1955	2325	2325
Min Ground Clearance (mm)	200	200	230	240	240	240
Front Track (mm)	805	805	875	885	885	885
Rear Track (mm)	715	715	830	835	960	960

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development.

SOLIS SOLIS 50

50
SHUTTLE XL

AGILE HIGH BACKUP
STAGE V ENGINE

12F+12R SYNCHROMESH
TRANSMISSION

HEAVY LIFT
CAPACITY

EASY FRONT AND
LOADER ATTACHMENT







SPACIOUS
OPERATOR AREA







S-TECH
ENGINE

S-BOOST
HYDRAULICS

TORQUE
MASTER

FEATURES 	
ITL ENGINE 	
No. of cylinders / capacity (cc) / emissions level	3/ 3065/ CRDi Stage V
After treatment system	DOC + DPF
Rated engine power (kw/Hp)	37.3/50
Rated engine speed	2000
Max. torque (Nm)	215@1400 Rpm
Aspiration	Turbo charged
Intercooler	●
Air Cleaner	Dual Stage Dry Type
Block Heater	○
Updraft Exhaust Pipe	●
Downdraft Exhaust Pipe	○
Fuel tank capacity (L)	72
DEF Tank capacity (L)	-
TRANSMISSION 	
12x12 Synchro Shuttle transmission (4WD)	●
Minimum forward speed	1.3kmph
Maximum forward speed	30kmph
Minimum forward speed	0.5kmph
Maximum forward speed	30kmph
FRONT AXLE 	
4WD Front Axle	●
Differential Lock	Mechanical
4WD Actuation	Mechanical
Brake Actuation	Mechanical Assist
PTO 	
PTO Type	Mechanical
540/540E	●
540/1000	○
HYDRAULIC 	
Hydraulic pump flow (lpm)	45
Open center mechanical draft control	●
Top link draft sensing	●
Lift Capacity	2500 KG
Linkage Category	II
Self Locking Linkages	○
Max. no. of rear remotes	2/3 (0)
Max. no. of Mid remotes	2

FEATURES 	
REAR HITCHES	
E-Mark Swinging Drawbar	●
Cuna Type Ladder Hitch	○
Semi Automatic Ladder Hitch	○
Automatic Ladder Hitch	○
TRAILER BRAKES 	
Without Trailer Brakes	●
Hydraulic Trailer Brakes	○
Dual Line Pneumatic Trailer Brakes	○
ELECTRICALS (ROPS/CAB) 	
Battery	
Alternator	90A/120A
Button Operated Battery Cut off Switch, 3 Pinsocket, Seven On Trailer Socket	●
OPERATOR ENVIRONMENT	
Suspended platform (with ROPS)	●
Premium Driver seat	○
Fender Mounted External Linkage Control	-
Cabin Air Conditioning (With Cabin)	○
DIMENSIONS (ROPS/CAB) 	
Wheelbase (mm)	2225
Overall Height (mm)	2690/2480
Overall Width (mm)	1840-1880
Overall Length (mm)	3825-4055
Front Track Width (mm)	1570
Rear Track Width (mm)	1450
Ground Clearance (mm)	310
Unladen Mass (Kg)	2870
Tyre Combination	9.5x20 & 13.6x28
Optional Tyre Combinations	
Radial Tyres (4WD)	250/85R20 & 340/85R28

6
PARMI LES
6 MEILLEURS CONSTRUCTEURS
DE TRACTEURS DANS LE MONDE *

3
PARMI LES 3 MEILLEURS
CONSTRUCTEURS DE
TRACTEURS EN INDE


PRÉSENCE
IMPORTANTE DANS
+ 120 PAYS


AVEC PLUS DE 5.500 EMPLOYÉS
ENGAGÉS ET/DE PLUS
400 INGÉNIEURS EN R&D


CO-ENTREPRISE
AVEC
YANMAR (JAPON)


CAPACITÉ DE PRODUCTION
DE 300.000
TRACTEURS PAR AN



SOILS

THE TOUGHEST
PERFORMER
« FOR YOUR FIELD »

60
SHUTTLEXL



- 3 CYLINDER DIESEL ENGINE
- 12F+12R SYNCHROMESH SHUTTLE TRANSMISSION
- HEAVY LIFT CAPACITY
- EASY FRONT AND LOADER ATTACHMENT
- HEAVY DUTY 4WD



COST EFFICIENT
MECHANICAL TRACTORS

MADE OF
REAL STEEL

STRATEGIC COLLABORATION WITH
YANMAR

THE TOUGHEST PERFORMER

FOR YOUR FIELD

60
SHUTTLEXL

Solis

FEATURES	60 SHUTTLEXL
ITL ENGINE	
No. of Cylinders / Capacity (cc) / Emissions Level	3/ 3065/ CRDI Stage V
After Treatment System	DOC + DPF
Rated Engine Power (kw/Hp)	43.2/58
Rated Engine Speed	2000
Max. Torque (Nm)	250@1400 Rpm
Aspiration	Turbo Charged
Intercooler	●
Air Cleaner	Dual Stage Dry Type
Block Heater	○
Updraft Exhaust Pipe	●
Downdraft Exhaust Pipe	○
Fuel Tank Capacity (L)	72
TRANSMISSION	
12x12 Synchro Shuttle Transmission (4WD)	●
Minimum Forward Speed	1.3kmph
Maximum Forward Speed	30kmph
12x12 Synchro Shuttle Transmission (4WD) with Creeper	○
Minimum Forward Speed	0.5kmph
Maximum Forward Speed	30kmph
FRONT AXLE	
2WD Front Axle	○
4WD Front Axle	●
Differential Lock	Mechanical
4WD Actuation	Mechanical
Brake Actuation	Mechanical Assist
PTO	
PTO Type	Mechanical
540/540E	●
540/1000	○
540/ground speed	○
HYDRAULIC	
Hydraulic Pump Flow (LPM)	45
Open Center Mechanical Draft Control	●
Top Link Draft Sensing	●
Liftomatic System	○
Lift Capacity	2500 KG
Linkage Category	II
Self Locking Linkages	○
Max. no. of Rear Remotes	2/3 (Opt.)
Max. no. of Mid Remotes	2
Mechanical Joystick Control for Mid Mounts with Valves	1 (Opt.)
REAR HITCHES	
E-Mark Swinging Drawbar	●

FEATURES	60 SHUTTLEXL
Cuna Type Ladder Hitch	○
Semi Automatic Ladder Hitch	○
Automatic Ladder Hitch	○
TRAILER BRAKES	
Without Trailer Brakes	●
Hydraulic Trailer Brakes	○
Dual Line Pneumatic Trailer Brakes	○
ELECTRICALS (ROPS/CAB)	
Battery	110AH 800CCA
Alternator	90A/120A
Button Operated Battery Cut off Switch, 3 Pinsocket, Seven on Trailer Socket	●
OPERATOR ENVIRONMENT	
Suspended platform (with ROPS)	●
Premium Driver Seat	○
Tiltable & Telescopic Steering	○
Integrated Loader Joystick	○
Cabin Air Conditioning (with Cabin)	○
DIMENSIONS (ROPS/CAB)	
Wheelbase (mm)	2225
Overall Height (mm)	ROPS: 2650 - 2700 CAB: 2450 - 2500
Overall Width (mm)	1825-1950
Overall Length (mm)	3830 - 4060
Front Track Width (mm)	1525 - 1570
Rear Track Width (mm)	1420 - 1440
Ground Clearance (mm)	310 - 355
Unladen Mass (Kg)	ROPS:2780 - 3315 CAB: 3340 - 3560
Tyre Combination	9.5x24 & 14.9x28
Optional Tyre Combinations	
Bias Tyres (2WD)	7.5x16 & 16.9x28
Bias Tyres (4WD)	9.5x24 & 16.9x28
Radial Tyres (4WD)	250/85 R24 & 420/85 R28
	280/85R24 AGRIMAX RT855 E 115A8/B SPL
	420/85R28 AGRIMAX RT855 E 139A8/B SPL
	320/70R24 AGRIMAX RT765 E 116D SPL
	480/70R28 AGRIMAX RT765 E 140D SPL
Industrial Tyres (4WD)	10-16.5 & 14.9-24
	12.5/80-18 & 18.4-24

● Standard ○ Optional

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.



SOLIS

THE TOUGHEST
PERFORMER
« FOR YOUR FIELD »

75
SHUTTLE XL



4 CYLINDER STAGE V
HIGH END TORQUE ENGINE

SYNCHRO SHUTTLE
TRANSMISSION

ADVANCED HYDRAULIC
LIFT CAPACITY

S COMMAND
CENTER

MULTIPLE
TYRE OPTIONS



**COST
EFFICIENT**

MECHANICAL TRACTORS

MADE OF
**REAL
STEEL**

STRATEGIC
COLLABORATION
WITH

YANMAR

THE TOUGHEST PERFORMER

FOR YOUR FIELD

75
SHUTTLE XL

Solis



FEATURES	75 SHUTTLE XL
ITL ENGINE	
No. of Cylinders / Capacity (cc) / Emissions Level	4/ 4087/ CRDi Stage V
After Treatment System	DOC + DPF
Rated Engine Power (kw/Hp)	55.9/75
Rated Engine Speed	2000
Max. Torque (Nm)	340@1400 Rpm
Aspiration	Turbo Charged
Intercooler	●
Air Cleaner	Dual Stage Dry Type
Block Heater	○
Updraft Exhaust Pipe	●
Downdraft Exhaust Pipe	○
Fuel Tank Capacity (L)	88
DEF Tank Capacity (L)	-
TRANSMISSION	
12x12 Synchro Shuttle Transmission (4WD)	●
Minimum Forward Speed	1.22kmph
Maximum Forward Speed	35kmph
20x20 Synchro Shuttle Transmission (4WD) with Super Creeper	○
Minimum Forward Speed	0.25kmph
Maximum Forward Speed	40kmph
FRONT AXLE	
4WD Front Axle	●
Differential Lock	Mechanical
4WD Actuation	Electro Hydraulic
Brake Actuation	Hydraulic Assisted
PTO	
PTO Type	Mechanical
540/540E	●
540/1000	○
540/Ground Speed	○
HYDRAULIC	
Hydraulic Pump Flow (LPM)	65
Draft Control	●
Liftomatic System	●
Lift Capacity	2500 Kg / 3000 Kg (0)
Linkage Category	II
Self Locking Linkages	○
Max. no. of Rear Remotes	2/3 (0)
Max. no. of Mid Remotes	○
Mechanical Joystick Control for Mid Mounts with Valves	1 (0)
REAR HITCHES	
E-Mark Swinging Drawbar	●
Semi Automatic Ladder Hitch	○
Automatic Ladder Hitch	○

FEATURES	75 SHUTTLE XL
Cuna Type Ladder Hitch	○
TRAILER BRAKES	
Without Trailer Brakes	●
Hydraulic Trailer Brakes	○
Dual Line Pneumatic Trailer Brakes	○
ELECTRICALS (ROPS/CAB)	
Battery	130AH 800CCA
Alternator	ROPS: 90A / Cab: 120A
Button Operated Battery Cut off Switch, 3 Pinsocket, Seven on Trailer Socket	●
OPERATOR ENVIRONMENT	
Suspended Platform (with ROPS)	●
Premium Driver Seat	○
Tiltable & Telescopic Steering	●
Integrated Loader Joystick	○
Cabin Air Conditioning (With Cabin)	○
DIMENSIONS (ROPS/CAB)	
Wheelbase (mm)	2350
Overall Height (mm)	ROPS: 2500 - 2730 Cab: 2490 - 2650
Overall Width (mm)	ROPS: 2000 - 2050 Cab: 2050 - 2080
Overall Length (mm)	ROPS: 4005 - 4230 Cab: 3915 - 4140
Front Track Width (mm)	1650-1850
Rear Track Width (mm)	1500-1700
Ground Clearance (mm)	300-420
Unladen Mass (Kg)	ROPS: 3550 - 3720 CAB: 3825 - 4245
Tyre Combination	11.2x24 & 16.9x30
OPTIONAL TYRE COMBINATIONS	
Bias Tyres (4WD)	12.4*24 18.4*30
Radial Tyres (4WD)	280/85R24 & 420/85R30 320/85R24 & 460/85R30 320/70R24 & 480/70R30 360/85R24 & 460/85R30

● Standard ○ Optional

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.

SOILS

THE TOUGHEST
PERFORMER
« FOR YOUR FIELD »

90
SHUTTLE XL



4 CYLINDER STAGE V
HIGH END TORQUE ENGINE

SYNCHRO SHUTTLE
TRANSMISSION

ADVANCED HYDRAULIC
LIFT CAPACITY

S COMMAND
CENTER

MULTIPLE
TYRE OPTIONS



**COST
EFFICIENT**
MECHANICAL TRACTORS

MADE OF
**REAL
STEEL**

STRATEGIC
COLLABORATION
WITH
YANMAR

**THE TOUGHEST
PERFORMER**
«« FOR YOUR FIELD »»

90
SHUTTLE XL

SOLIS



FEATURES	90 SHUTTLE XL
ITL ENGINE	
No. of Cylinders / Capacity (cc) / Emissions Level	4/ 4087/ CRDi Stage V
After Treatment System	DOC + DPF + SCR (Ad Blu)
Rated Engine Power (kw/Hp)	67.3/90
Rated Engine Speed	2200
Max. Torque (Nm)	375@1400 Rpm
Aspiration	Turbo Charged
Intercooler	●
Air Cleaner	Dual Stage Dry Type
Block Heater	○
Updraft Exhaust Pipe	●
Downdraft Exhaust Pipe	○
Fuel Tank Capacity (L)	110
DEF Tank Capacity (L)	12
TRANSMISSION	
12x12 Synchro Shuttle Transmission (4WD)	●
Minimum Forward Speed	1.22kmph
Maximum Forward Speed	35kmph
20x20 Synchro Shuttle Transmission (4WD) with Super Creeper	○
Minimum Forward Speed	0.25kmph
Maximum Forward Speed	40kmph
FRONT AXLE	
4WD Front Axle	●
Differential Lock	Mechanical
4WD Actuation	Electro Hydraulic
Brake Actuation	Hydraulic Assisted
PTO	
PTO Type	Mechanical
540/540E	●
540/1000	○
540/Ground Speed	○
HYDRAULIC	
Hydraulic Pump Flow (LPM)	65
Draft Control	●
Liftomatic System	●
Lift Capacity	3000 Kg / 3500 Kg (0)
Linkage Category	II
Self Locking Linkages	○
Max. no. of Rear Remotes	2/3 (0)
Max. no. of Mid Remotes	○

● Standard ○ Optional

*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All Dimensions are with standard tyres.




FEATURES	90 SHUTTLE XL
Mechanical Joystick Control for Mid Mounts with Valves	○
REAR HITCHES	
E-Mark Swinging Drawbar	●
Semi Automatic Ladder Hitch	○
Automatic Ladder Hitch	○
Cuna Type Ladder Hitch	○
TRAILER BRAKES	
Without Trailer Brakes	●
Hydraulic Trailer Brakes	○
Dual Line Pneumatic Trailer Brakes	○
ELECTRICALS (ROPS/CAB)	
Battery	130AH 800CCA
Alternator	120A
Button Operated Battery Cut off Switch, 3 Pinsocket, Seven on Trailer Socket	●
OPERATOR ENVIRONMENT	
Suspended Platform (with ROPS)	●
Premium Driver Seat	○
Tilttable & Telescopic Steering	○
Integrated Loader Joystick	○
Cabin Air Conditioning (with Cabin)	○
DIMENSIONS (ROPS/CAB)	
Wheelbase (mm)	2350
Overall Height (mm)	2700-2720
Overall Width (mm)	2030-2050
Overall Length (mm)	3985-4205
Front Track Width (mm)	1675
Rear Track Width (mm)	1510
Ground Clearance (mm)	370
Unladen Mass (Kg)	4035
Tyre Combination	12.4x24 & 18.4x30
OPTIONAL TYRE COMBINATIONS	
Bias Tyres (4WD)	13.6*24
	16.9*34
Radial Tyres (4WD)	320/85R24 & 460/85R30
	320/70R24 & 480/70R30
	360/85R24 & 460/85R30
	420/65R24 & 540/65 R34



WWW.SOLISBELGIUM.BE

SOLIS

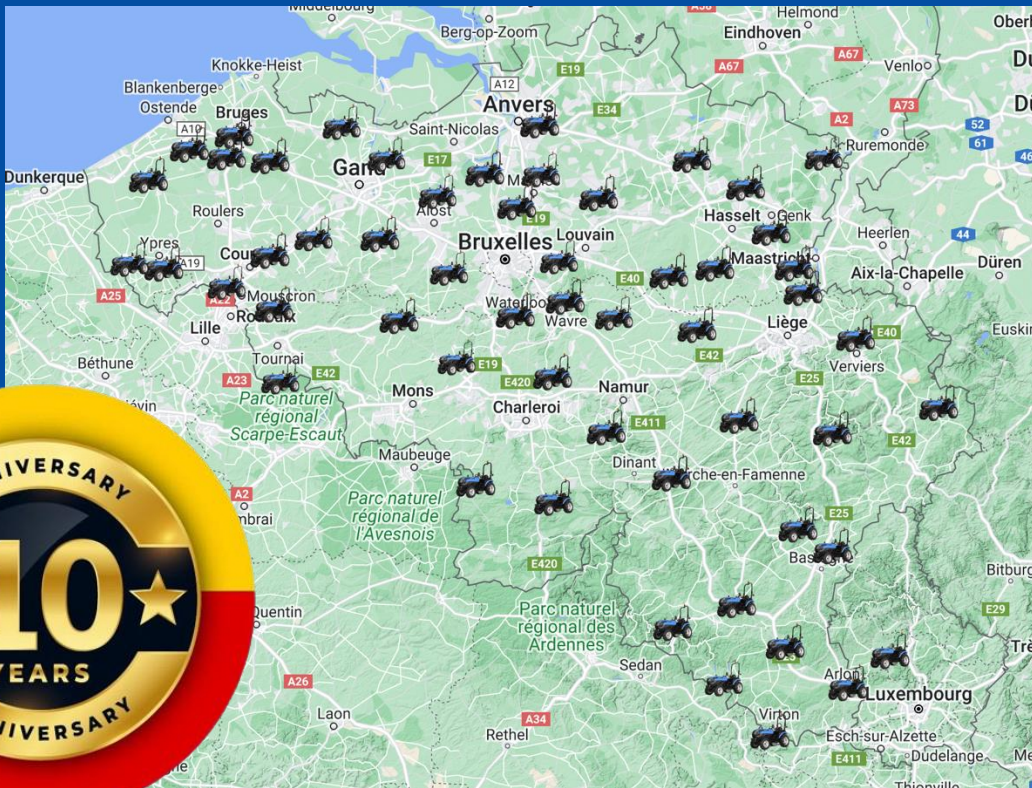

1370 JODOIGNE - **VANMELLAERT ETS** ☎ 010/45.36.59.
 1495 MARBAIS - **BUYS ETS** ☎ 071/85.15.85
 1410 WATERLOO - **OUTIVERT** ☎ 02/478.76.00.
 1760 ROOSDAAL - **ROOSELEER & CO BV** ☎ 054/33.13.82.
 2110 WIJNEGEM - **BEECKMAN TUINMACHINES** ☎ 03/322.88.00.
 2221 BOOISCHOT - **VAN BAELE & ZN TUINCENTER** ☎ 015/22.21.93.
 2491 OLMEN - **KEMPENSE TUINMACHINES** ☎ 0489/54.91.08.
 2570 DUFFEL - **VAN DEN EYNDE JOEL NV** ☎ 015/31.35.31.
 2811 MECHELEN - **VALOTRAK** ☎ 015/61.39.08.
 2880 BORNEM - **VAN ACHTER TUINMACHINES** ☎ 03/889.88.34.
 3012 WILSELE - **DECREE TUINMACHINES** ☎ 016/44.87.49.
 3040 OTTENBURG - **KUMPS JOHNNY BV** ☎ 0478/64.89.55
 3061 LEFEDAAL - **TECHNIGARDEN** ☎ 02/767.51.03.
 3350 MELKWEZER-LINTER - **THIRY AGRI BV** ☎ 011/78.06.71.
 3600 GENK - **HENDRIKS MACHINES** ☎ 0470/68.38.05.
 3640 KINROOI - **VANGELOVEN AGRI** ☎ 0479/67.45.96.
 3770 VLIJTINGEN-RIEMST - **VKERKHOFS MECHANISATIE** ☎ 012/21.31.61.
 3800 SINT-TRUIDEN - **DEKENS AGRI TECHNICS BV** ☎ 011/68.44.10.
 4250 GEER - **AGRIGER** ☎ 019/77.00.75.
 4560 CLAVIER - **LOUIS PIERRE** ☎ 086/34.47.26.
 4750 ELSENBORN - **MACKELS REINER** ☎ 080/44.55.31.
 4890 THIMISTER-CLERMONT - **LOUSEN ALAIN SRL** ☎ 087/44.52.19.
 4987 STOU MONT - **SERVATY RENAUD** ☎ 0496/32.95.94.
 5170 LESVE - **TASIAUX & FILS SRL** ☎ 081/43.44.83.
 5555 BIEVRE - **RENAULD-COLLARD & FILS** ☎ 061/46.68.05.
 5600 PHILIPPEVILLE/ BEAUMONT/CINEY/DOUR - **DURANT SRL** ☎ 071/66.74.92.

6767 DAMPICOURT - **AJL AGRI** ☎ 063/58.19.93.
 6800 LIBRAMONT/BASTOGNE/ARLON - **LEROY-GAUTHIER** ☎ 061/21.16.69.
 6820 FLORENVILLE - **GARAGE DIDIER** ☎ 061/41.18.67.
 6860 RANCIMONT - **RANCI-AGRI SRL** ☎ 063/43.37.97.
 6983 LA ROCHE EN ARDENNE - **SOROGÉ ETS** ☎ 084/43.31.28.
 7090 BRAINE-LE-COMTE - **FORESTAR SHOP** ☎ 067/83.07.06.
 7621 LESDAIN - **CREA SERVICES BELGIUM SRL** ☎ 0475/47.01.11.
 7866 BOIS-DE-LESSINES - **DOOMS AGRI SRL** ☎ 068/33.69.91.
 8200 SINT-ANDRIES - **MAES DANY** ☎ 050/39.25.90.
 8210 ZEDELGEM - **DEMEULENAERE MIEL** ☎ 0493/44.38.35.
 8460 OUDENBURG - **MEYNS BV** ☎ 050/81.66.24.
 8587 SPIERE - **DELDAELE GEBRS BV** ☎ 056/45.61.11.
 8600 DIKSMUIDE - **DE CEUNYNCK BV** ☎ 051/55.55.83.
 8730 BEERNEM - **VAN VYNCKT TUINMACHINES BV** ☎ 050/78.98.76.
 8791 BEVEREN-LEIE - **DEBLAUWE MACHINES BV** ☎ 056/71.81.94.
 8830 HOOGLEGE-GITS - **BEYLS ARTHUR BV** ☎ 051/81.48.74.
 8900 IEPER - **DEJONCKHEERE TUINMACHINES** ☎ 0476/60.11.64.
 8930 REKKEM/LAUWE - **VERDE BV** ☎ 056/41.30.73.
 8970 POPERINGE - **DESOMER-PLANCKE BV** ☎ 057/33.30.04.
 9080 ZAFFELARE - **DE KERPEL TUIN EN BOSBOUWMACHINES** ☎ 0496/38.18.64.
 9200 APPELS - DENDERMONDE - **PELEMAN BV** ☎ 052/21.20.44.
 9770 KRUSHOUTEM - **VH-RECUP** ☎ 09/383.88.17.
 9860 BALEGEM - **MARIJSSE BV** ☎ 09/362.65.38. - 0477/21.25.06.
 9971 LEMBEKE - **AUDENAERT LUC & DIRK NV** ☎ 09/373.69.76.
 GRAND-DUCHE de LUXEMBOURG - **JACOBY SA** ☎ +352.23.63.82.32.

WWW.SOLISBELGIUM.BE

